TEAC gehört zu den weltweit führenden Herstellern technologisch innovativer Speichermedien. OEM-Hersteller, Distributoren und Endanwender schätzen die hohe Zuverlässigkeit und die universellen Einsatzmöglichkeiten unserer Produkte.

TEAC is one of the world's top manufacturers for innovative storage media. Leading OEMs, distributors as well as endusers appreciate the high reliability and versatility of its products.

TEAC fait partie des constructeurs les plus en pointe au monde pour les supports de stockage technologiquement innovants. Les constructeurs OEM les plus rennommés, les distributeurs et les utilisateurs finals apprécient la haute fiabilité et les possibilités universelles de mise en œuvre de nos produits.

TEAC®

TEAC Deutschland GmbH
Fax: 49/611/715892
TEAC UK Ltd.
Fax: 44/1923/236290
TEAC France
Fax: 33/1/42376545

Dream Team

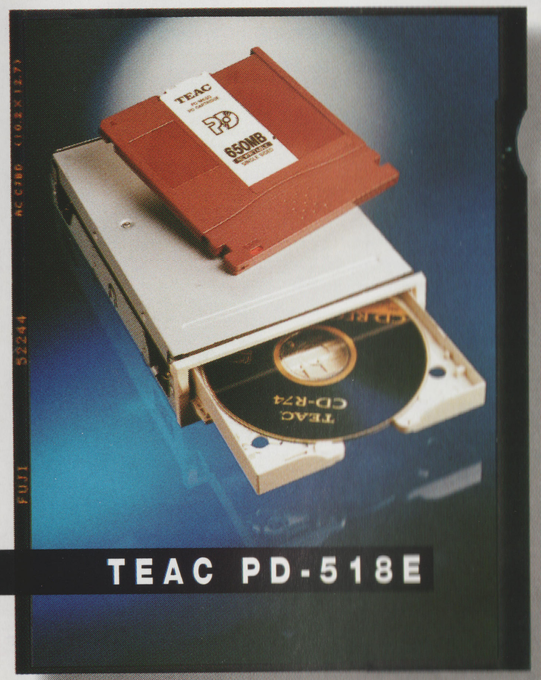

PD-Drive / 650 MB / 8x

TEAC®

Write on Time

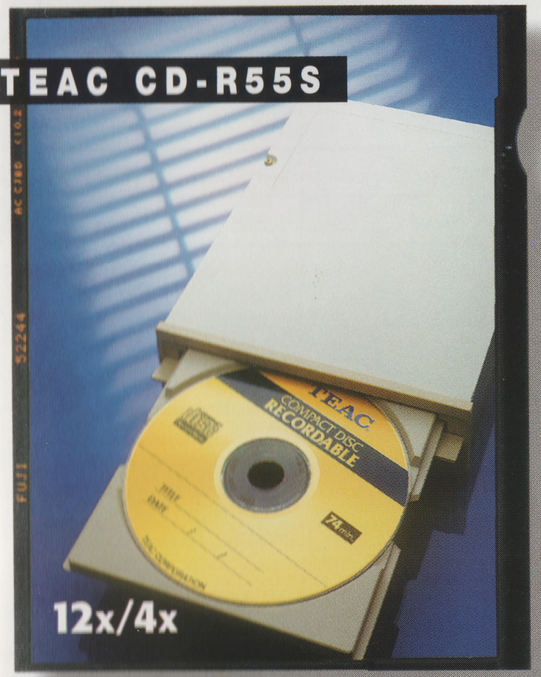

CD-ROM-Recordable Drive

TEAC®

Time to Change

8x-CD-ROM Changer

TEAC®

Prime Time

16x-SCSI CD-ROM Drive

TEAC

Pole Position

24x-ATAPI / IDE CD-ROM Drive

TEAC

Road Runner

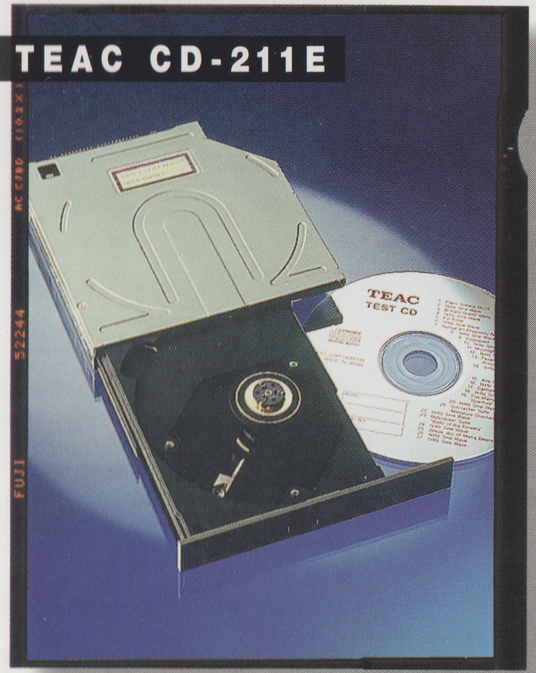

11x Notebook Drive

TEAC

Serve and Volley

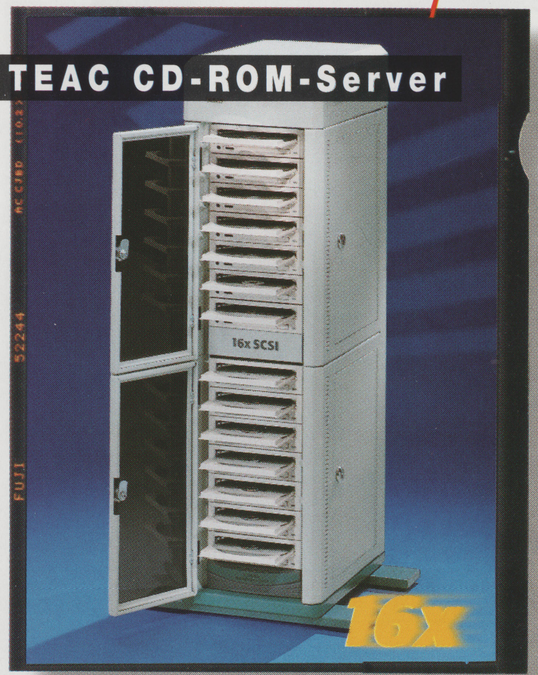

Max. fourteen 16x-SCSI Drives

TEAC

Compact Class

3,5"-Floppy Disk Drives

TEAC

Best Seller

3,5"-Floppy Disk Drives

TEAC

PowerMax 120/2

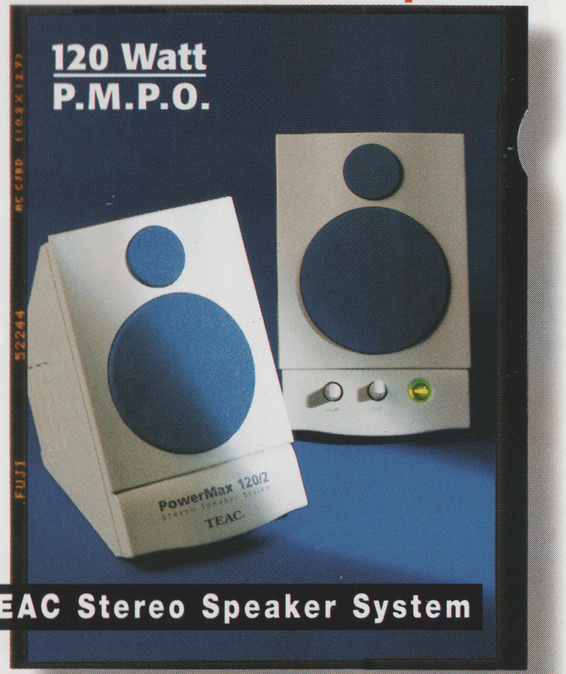

8 cm full range active speaker

TEAC

PowerMax 240/2

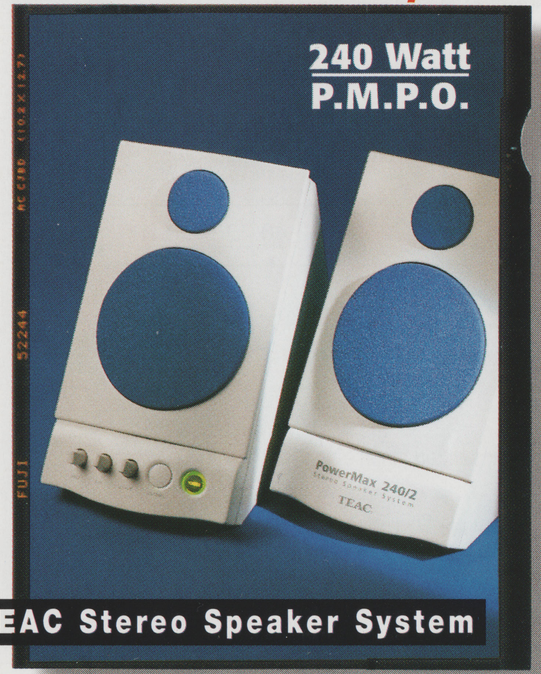

2-way active speaker

TEAC

Specifications:

Model:	CD-C68E
Performance:	8x
Number of discs:	6
Access Time:	190 ms
Transfer Rate:	1,2 MB/sec.
Interface:	ATAPI/IDE
Compatibility:	CD-DA, CD-I, CD-ROM XA Mode-2, Video-CD, Enhanced-CD, Photo-CD
Disc Loading:	Power Tray
MTBF:	50,000 hrs.

Including English, French and German software and user guides

TEAC®

Specifications:

Model:	CD-R55S
Performance:	12x-read/4x-write
Recording Speed:	650 MB/approx. 15 Min.
Access Time:	165 ms
Transfer Rate:	1.800 KB r/600 KB w/sec.
Buffer Size:	1 MB
Interface:	High-Speed-SCSI-2-Interface
Compatibility:	CD-DA, CD-I, Video-CD, CD-ROM-XA, CD-Plus, Enhanced-CD, Photo-CD
Recording Mode:	Disk-at-Once, Track-at-once,-multisession,-incremental, Packet writing
Disc Loading:	Motorized Tray
MTBF:	30,000 hrs.

Including multilingual software and user guides (D/E/F/I/ES)

TEAC®

Specifications:

Model:	PD 518E	
Mode	PD	CD-ROM
Transfer Rate:	1,2 MB/sec.	1,2 MB/8 x
Access Time:	115 ms	125 ms
Rotation Speed	2,027 rpm	max. 4,240 rpm
Interface:	ATAPI/IDE	
Voltage:	+5V DC	+12V DC
Disc Loading:	Power Tray	
MTBF:	30.000 hrs	
Dimensions:	146 x 41,3 x 203 mm	
Weight:	1,200 g	

Including English, French and German software and user guides

TEAC®

Everything in Store

PC WELT
FAVORIT DER LESER
97
Teac

TEAC®

http://www.teac.de

Specifications:

Model:	CD-ROM-Server
Network Interface:	Ethernet/Token Ring
Network Protocol:	SMB via NetBIOS NFS via TCP/IP
Operating Systems:	DOS/Windows, OS/2 WARP, Windows NT, Windows 95, UNIX LAN-Server
CD-ROM-Drive Data:	
Transfer Rate: Access Time: Interface: Buffer Size:	2,4 MB sec. / 16x 135 ms SCSI-2 Interface 256 KB
Compatibility:	CD-DA, CD-I, Video-CD, CD-ROM-XA Mode-2, CD-Plus, Enhanced-CD, Photo-CD
Disc Loading:	Power Tray
MTBF:	50,000 hrs.

Option:
7 or 14 SCSI-CD-ROM Drives

TEAC®

Specifications:

Model:	CD-211E
Performance:	11x
Access Time:	200 ms
Transfer Rate:.	1,65 MB/sec.
Buffer Size:	128 KB
Interface:	ATAPI/IDE
Compatibility:	Compatible to all current CD-ROM-Standards
MTBF:	50,000 hrs.
Weight	280 g
Dimensions:	12.7 x 128 x 130 mm

TEAC®

Specifications:

Model:	CD-524E
Performance:	24x
Access Time:	95 ms
Transfer Rate:	max. 3,6 MB/sec.
Buffer Size:	128 KB
Interface:	ATAPI/IDE
Compatibility:	CD-DA, CD-I, Video-CD, CD-ROM-XA Mode-2, CD-Plus, Enhanced-CD, Photo-CD
Disc Loading:	Power Tray
MTBF:	100,000 hrs.
Mounting:	vertical/horizontal

Including English software and multilingual user guides

TEAC®

Specifications:

Model:	CD-516S
Performance:	16x
Access Time:	150 ms
Transfer Rate:	2,4 MB/sec.
Buffer Size:	512 KB
Interface:	SCSI
Compatibility:	CD-DA, CD-I, Video-CD, CD-ROM-XA Mode-2, CD-Plus, Enhanced-CD, Photo-CD
Disc Loading:	Power Tray
MTBF:	100,000 hrs.
Mounting:	vertical/horizontal

Including English, French and German software and user guides

TEAC®

Specifications:

Model:	Power Max 240/2
System:	2-way active speakers 10.5 cm, woofer 5.1 cm tweeter
Output:	240 W P.M.P.O. / integrated amplifier
Frequency:	40 - 20,000 Hz

Sie senden uns ein Fax,
wir senden Ihnen eine Liste der TEAC-Distributoren.

Please send us a fax,
we 'll send you a list of TEAC distributors.

Envoyez-nous un fax,
nous vous enverrons une liste des distributeurs TEAC.

Magnetic screening, front operation buttons, complete with all connecting cables

TEAC®

Specifications:

Model:	Power Max 120/2
System:	8 cm full range active speaker; 5,1 cm tweeter
Output:	120 W P.M.P.O. / integrated amplifier
Frequency:	50 - 20,000 Hz

Magnetic screening, front operation buttons, complete with all connecting cables

TEAC®

Specifications:

Model:	FD-235-Series
Data Capacity:	1 / 1.6 / 2 MB unformatted
Rotation Speed:	300 / 360 rpm
Access Time:	94 ms
Power Consumption:	R/W 1.15W typical Stand-by 15 mW typical
Dimensions:	101.6 x 25.4 x 145 mm
Weight:	345 g
MTBF:	30,000 hrs.

TEAC®

Specifications:

Model:	FD-05-Series
Data Capacity:	1 / 1.6 / 2 / 4 MB unformatted
Rotation Speed:	300 / 360 rpm
Access Time:	94 ms
Power Consumption:	R/W 1.15W typical Stand-by 15 mW typical
Dimensions:	96 x 12.7 x 126 mm
Weight:	172/175 g
MTBF:	30,000 hrs.

TEAC®